


Mini-Turbo™ VF

APPLIED MODERNIZATION FOR THE VF HATCHER

Our popular Turbo-Hatch concept is now scaled for use in vertical fan-frame hatchers to radically improve performance

- 3-stage water delivery system with up to 50% increase in cooling capacity.
- Greater fan size with 450mm (18") pulley offers superior airflow and cooling efficiency.
- Operates with dramatic rise in chilled water temperature up to 17°C (63°F) that creates far less coil condensation and reduced chiller energy consumption.
- Integrated operator safety door switch and fan fail alarm creates a safe environment for your staff and chicks.
- Permanently connected electric power and chilled water services.
- Stainless steel assembly with integral roof support to extend hatcher life.
- Energy efficient 3-phase roof mounted fan motor with VFD for increased power savings and optional basket drying.

HAVE YOU
TURBO'D
YOUR VFs?

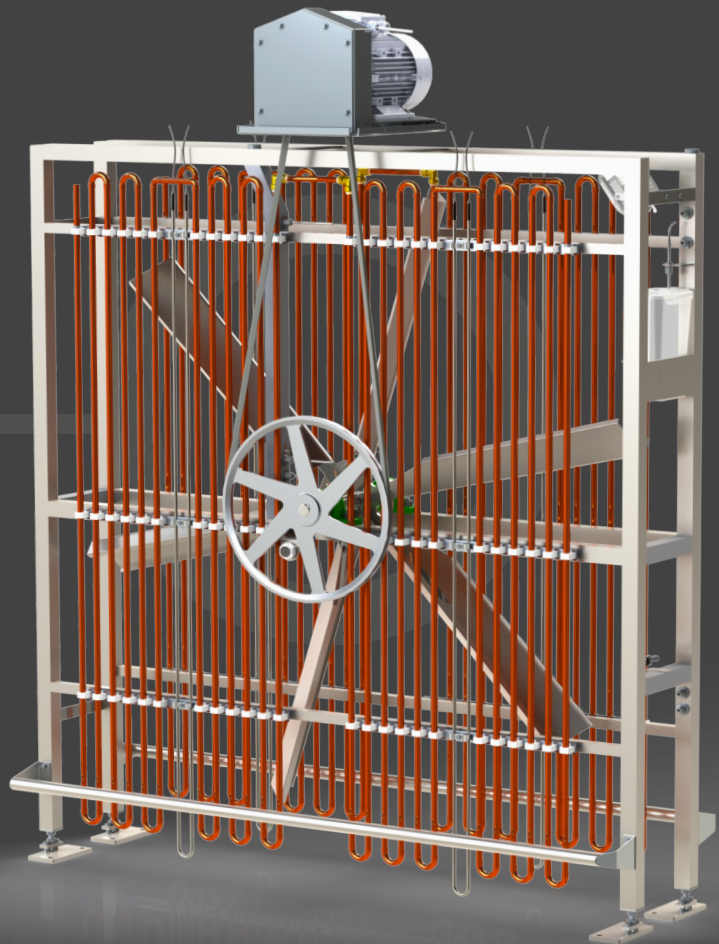

A SIMPLE REPLACEMENT FOR YOUR OUTDATED FAN-FRAME SYSTEMS